

● INJECTION PRESS RANGE: 20-40 TON ●

*Digital AC SERVO Robot Series*

# T-400VII

# TS-400VII



## COMMON SPECIFICATIONS

Power Source	Air Pressure	Drive	Posture (air cylinder)	Recommended Max Load	Posture Torque @ 70 PSI	Control Types
200 VAC ± 10% 60 Hz	70 psi (.48 MPa)	AC Servo Motor	90°	4 lbs (2 kg)	4.0 ft-lbs (5.4 N•m)	STEC-520B

## GENERAL SPECIFICATIONS

Model	Stroke				Electric Consumption (kVA)	Max Power Consumption (kW)	Main Body Weight (KG)	Air Consumption (ft³)
	(P) Vertical	(R) Vertical	Crosswise	Traverse				
T-400VII	15.75" (400 mm)	N/A	13.39" (340 mm)	39.37" (1000 mm)	1.5	0.9	119 (262 lbs)	0.032 (0.9 NI / Cycle)
TS-400VII	15.75" (400 mm)	21.65" (550 mm)	(P)11.34" (288 mm) (R)11.34" (288 mm)	39.37" (1000 mm)	2.4	1.4	134 (295 lbs)	0.032 (0.9 NI / Cycle)


## STANDARD FEATURE

Vacuum Generator with Part Present Sensor
Part Grip Circuit
Sprue Grip Circuit
USB Port
Ethernet Port
Sample and Chuck Change Positons
Product Packaging (256 each axis)
CNC Step Programming
Micro SD
CPC® and AMP® Connections at the Head
Active Vibration Control
IMM Mounting Weldment
Multi- Level Password Protection
Position, Speed and Timer Adjust in Auto
Alarm History
Grease Pocket LM Bearings

## OPTION LIST

Additional Vacuum Generator with Part Present Sensor
Additional Part Grip
Nipper on Chuck
Rotation 90°, 180° 2-Position, 180° 3-Position
Shuttle on Tool
Mold Spray
Air Blow
1-3 Color Alarm Light
Special Paint
Free Packaging
Central Lube
Quick Chuck Change

## OVERALL DIMENSIONS

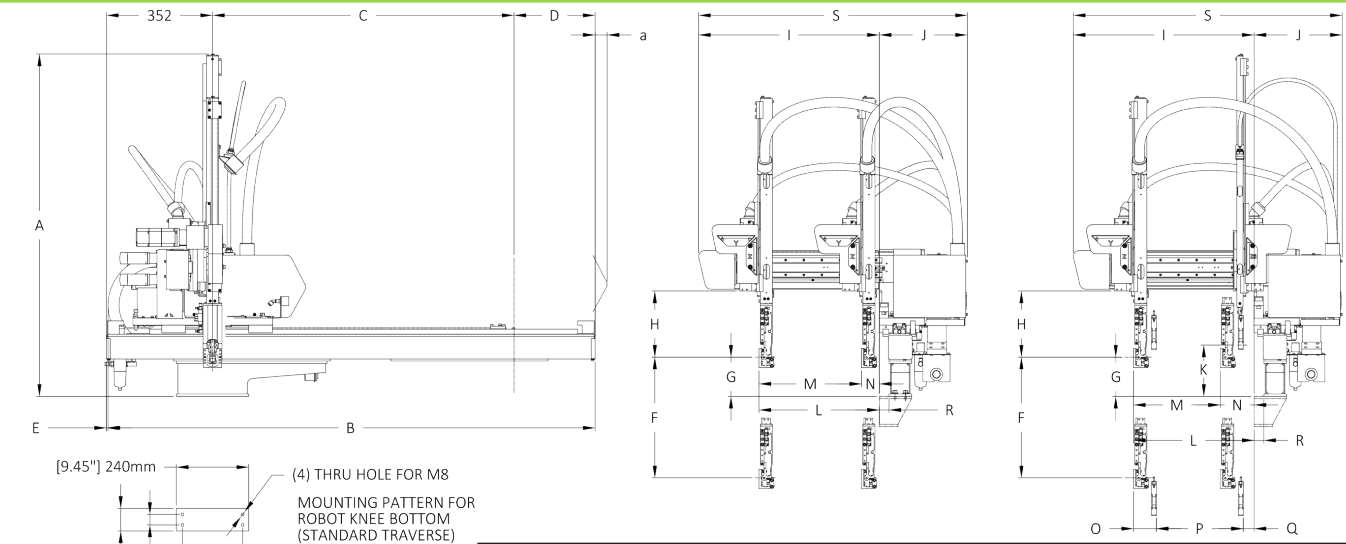

		T-400VII	TS-400VII
A	Overall Height	39.15" (994.50mm)	44.79" (1137.70mm)
B	Overall Width	63.82" (1621mm)	63.82" (1621mm)
C	Traverse Stroke	39.37" (1000mm)	39.37" (1000mm)
D	Overhang, Release Side	10.59" (269mm)	10.59" (269mm)
E	Cable Guide Overhang	0	0
F	(P) Vertical Stroke	15.75" (400mm)	15.75" (400mm)
G	(P) Vertical Standby	5.12" (130mm)	5.12" (130mm)
H	Bottom of Crosswise to Chuck Mount Postion	8.62" (219mm)	8.62" (219mm)
I	Mold Mounting Face - Crosswise Arm End	23.59" (599.30mm)	23.59" (599.30mm)
J	Mold Mounting Face - Box End	11.51" (292.30mm)	11.51" (292.30mm)
K	(R) Vertical Standby	-	6.69" (170mm)
L	(P) Crosswise Reach Max.	15.75" (400mm)	15.75" (400mm)
M	(P) Crosswise Stroke Max.	13.39" (340mm)	11.34" (288mm)
N	(P) Crosswise Standby Min.	2.36" (60mm)	4.41" (112mm)
O	(P)(R) Proximity Min.	-	2.99" (76mm)
P	(R) Crosswise Stroke Max.	-	11.34" (288mm)
Q	(R) Crosswise Standby Min.	-	1.42" (36mm)
R	Base Offset	1.26" (32mm)	1.26" (32mm)
S	Box End - Crosswise Arm End	35.08" (891mm)	35.08" (891mm)
a	Cover Guide Overhang	1.54" (39mm)	1.54" (39mm)



**Wisconsin (HQ)**  
 N90 W14401 Commerce Drive  
 Menomonee Falls, WI 53051  
 Phone: 262-253-3550  
 Fax: 262-253-3559  
 Email: kscheife@starautomation.com

**California**  
 18141 Beach Blvd. Unit 195  
 Huntington Beach, CA 92648  
 Phone: 714-375-2400  
 Fax: 714-375-2446  
 Email: ryamasaki@starautomation.com

**Georgia**  
 5555 Oakbrook Parkway Suite 320  
 Norcross, GA 30093  
 Phone: 770-582-9350  
 Fax: 770-582-9351  
 Email: chebert@starautomation.com

**Indiana**  
 5625 Vogel Road Unit B  
 Evansville, IN 47715  
 Phone: 812-475-9947  
 Fax: 812-475-9949  
 Email: sberry@starautomation.com

**Michigan**  
 17197 North Laurel Park Dr. Suite 125  
 Livonia, MI 48152  
 Phone: 734-462-9522  
 Fax: 734-462-9527  
 Email: ttsukuda@starautomation.com

**Rhode Island**  
 860A Waterman Avenue  
 E Providence, RI 02914  
 Phone: 401-434-0617  
 Fax: 401-434-0627  
 Email: sales@starautomation.com

**Tennessee**  
 Sales Phone: 678-428-4202  
 Service Phone: 615-796-5670  
 Email: chebert@starautomation.com

**Star Seiki Mexico S.A. De C.V.**  
 Blvd Bernardo Quintana #7001  
 Torre II Oficina 1004 Colonia Centro Sur,  
 Queretaro, CP. 76090 Mexico  
 Phone: +52-442-199-5180  
 Email: knomura@starseikimexico.com